

AE

Hot Water
Calorifier / Tank




Standard Features

1. Tank Material:
SS 316 / 304
2. Designed to
ASME & BS codes
3. PU Insulated
c/w Jacketing
4. Flanged Manhole
5. Pressure Relief Valve
6. Air Vent
7. Vacuum Valve


CAPACITY LITRES	DIMENSIONS mm				DRY WEIGHT kg STEEL Test 7.0 Bar Design 5.0 Bar
	A	B	C	D	
440	1800	600	1350	250	250
550	1700	675	1150	300	240
700	1750	750	1150	300	280
800	1950	750	1300	300	300
900	2000	800	1350	330	335
1000	1950	850	1300	330	340
1200	2100	900	1400	345	395
1350	2350	900	1550	345	420
1500	1950	1050	1300	395	500
1800	2300	1050	1550	395	585
2000	2500	1050	1650	395	600
2300	2400	1150	1600	410	640
2500	2450	1200	1650	430	685
3000	2900	1200	1950	430	985
3500	2700	1350	1800	475	1025
4000	3050	1350	2050	475	1135
4500	3400	1350	2250	475	1240
5000	3200	1450	2400	500	1245
6000	3800	1450	2850	500	1460
7000	3300	1680	2475	475	1830
8000	3700	1680	2850	475	2050
9000	4200	1680	3150	475	2230
10000	4600	1680	3600	475	2490
12500	5000	1830	3750	550	2825
15000	6000	1830	4500	550	3310

STANDARD CONNECTION

- E Primary Supply
- F Primary Return
- G Cold Water Supply
- H Hot Water Supply
- I Hot Water Return
- J Drain
- K Temperature Gauge
- L Pressure Gauge
- M Sensor
- N Safety Valve
- O Air Vent
- P Vacuum Valve
- Q Manhole
- R Heating Element

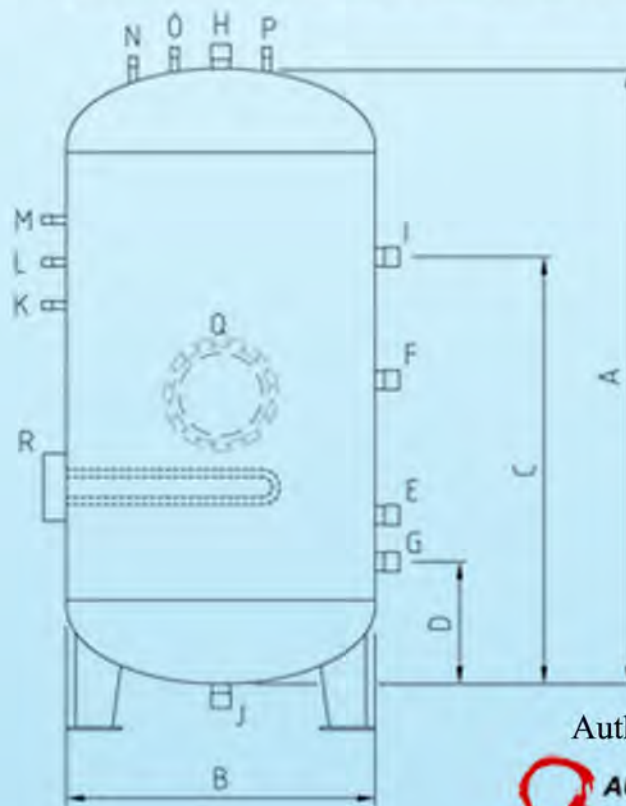

Authorised Dealer



Blk 2 Balestier Road
#01-695,
Singapore 320002
Tel: 6846 4774, Fax: 6846 4334
Email: Enquiry@aumada.com.sg
Website: www.aumada.com.sg